


Type: MPE

Radial-Dipped 徑向導線

Features 特性

- Epoxy resin coating and high moisture resistance.
- Non-inductive construction.
- Self-healing characteristic.
- Miniature size and light weight.
- 環氧樹脂成型塗裝、防潮性佳。
- 無極性。
- 具自愈性。
- 體積小、重量輕。

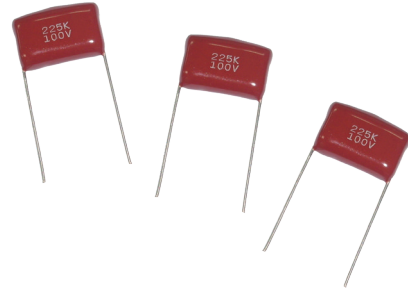

Applications 用途

- Bypass timing.
- Signal coupling.
- General purpose.
- 旁路應用。
- 信號耦合。
- 一般用途。

Specifications 規格

Rated Voltage 額定電壓	100 ~ 630VDC
Capacitance Range 電容量範圍	0.01 ~ 4.7 μ F
Capacitance Tolerance 容量誤差	J ($\pm 5\%$), K ($\pm 10\%$), M ($\pm 20\%$)
Dissipation Factor (DF) 損耗因數	$\leq 1\%$ Max. at 1kHz and 20°C
Insulation Resistance (IR) 絕緣阻抗	C $\leq 0.33\mu$ F, IR $\geq 0,000 M\Omega$ C > 0.33 μ F, IR $\geq 10,000 M\Omega / \mu$ F
Dielectric Strength 耐電壓	150% of rated voltage for 60sec
Operating Temperature 操作溫度	-40 ~ +85°C

Dimensions 尺寸

Rated Voltage	100VDC / 63VAC				250VDC / 160VAC				400VDC / 200VAC				630VDC / 220VAC			
Size (mm)	W	H	T	P ± 1	W	H	T	P ± 1	W	H	T	P ± 1	W	H	T	P ± 1
0.01	14	10	6	10	14	10	6	10	14	10	6	10	14	10	6	10
0.015	14	11.5	6.5	10	14	11.5	6.5	10	14	11.5	6.5	10	14	11.5	6.5	10
0.022	14	11	7	10	14	11	7	10	14	11	7	10	14	12.5	7	10
0.033	14	11.5	7	10	14	11.5	7	10	14	11.5	7	10	14	13.5	9	10
0.047	14	11.5	7	10	14	11.5	7	10	14	11.5	7	10	19	12.5	7.5	15
0.068	14	11.5	7	10	14	11.5	7	10	19	13	6	15	19	14.5	9	15
0.1	14	10	6	10	14	10	7	10	19	13	7	15	19	15.5	9.5	15
0.15	14	10	6	10	14	12	8	10	19	14	7.5	15	24	17	10	20
0.22	14	10.5	6.5	10	19	12	8	15	19	16	10	15	24	20	11	20
0.33	14	11.5	8.5	10	19	13	8	15	24	16	10	20	24	22	13	20
0.47	19	12	7	15	19	15	8	15	24	18.5	11	20	32	22	13	27.5
0.68	19	14	7.5	15	24	15.5	9	20	32	18.5	11.5	27.5	35	26	15	31
1.0	19	15	8.5	15	24	17	10	20	32	22	12	27.5	35	30	17	31
1.5	24	17	9	20	24	21	11.5	20	32	24	14	27.5				
2.2	24	20	9	20	32	22	13	27.5	35	24.5	15	31				
3.3	24	20	12	20	32	26	16	27.5	35	30	18	31				
4.7	32	22	13	27.5	35	23	15	31								